


FL4G11Y/FLR4G11Y

Cavi automotive multipolari isolati in EVA con guaina in PUR.
Automotive multi-core flexible cable EVA insulated and PUR sheathed.

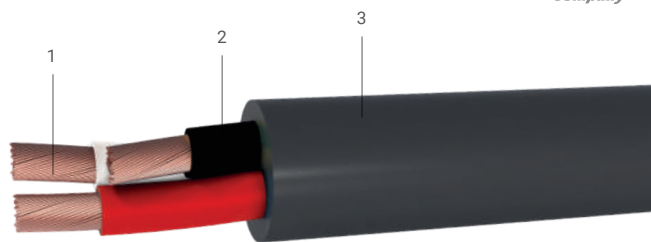

1. Rame flessibile ISO 6722 tipo A | Flexible copper ISO 6722 type A • 2. EVA Acetato di etile/vinile | EVA Ethylene/vinyl acetate • 3. TPE-U Termoplastico elastomero di poliuretano | TPE-U Thermoplastic polyurethane elastomer

Applicazioni | Applications

FL4G11Y/FLR4G11Y: Cavi con guaina in TPE-U (Poliuretano) ed isolamento in EVA per uso automotive in applicazioni a bassa tensione, anche in ambienti ad alta temperatura, molto esposti alle fonti di calore dirette. Guaina resistente all'abrasione con buone caratteristiche meccaniche e buona resistenza chimica.

FL4G11Y/FLR4G11Y: TPE-U (Thermoplastic polyurethane elastomer) sheathed and EVA insulated flexible cords suitable for automotive use on low voltage application and systems, also in hot environment, with high exposure to heat sources on the cables. Abrasion resistant sheath with good mechanical properties and good chemical resistance.

Norme | Standards



ISO 6722-1 • ISO 14572 • DIN 47100

Confezionamento | Packaging



Caratteristiche | Characteristics

Colore guaina
Sheath colour

Temperatura di esercizio
Operating temperature

Raggio di curvatura min.
Min. bending radius

Tensione di esercizio
Rated voltage

A richiesta
On request

-40°C + 150°C sull'isolamento
-40°C + 150°C on the insulation
-40°C + 100°C su cavo completo
-40°C + 100°C on complete cable

Posa mobile: 4 x diametro esterno
Mobile installation: 4 x outer diameter
Posa fissa: 3 x diametro esterno
Fixed installation: 3 x outer diameter

220 V a.c. ÷ 300 V d.c.

PUR

RUB
BER
HFX

