


H05RN-F

Cavi flessibili isolati in gomma EPR sotto guaina media di policloroprene.

Flexible cables EPR rubber insulated, polychloroprene sheathed.

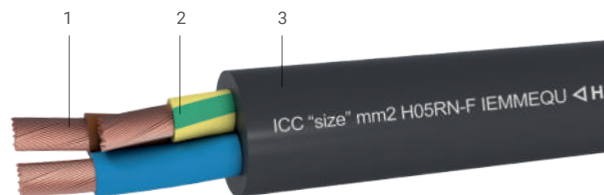

1. Rame flessibile Classe 5 CEI EN 60228 | Flexible copper Class 5 CEI EN 60228
2. Gomma EI4 | Rubber EI4 • 3. Gomma EM2 | Rubber EM2

Applicazioni | Applications

Uso in locali domestici, cucine e uffici, per applicazioni di lavoro ordinarie e fornitura di apparecchi in cui i cavi sono soggetti a basse sollecitazioni meccaniche (ad esempio aspirapolvere, apparecchi di cottura, saldatori, tostapane, strumenti portatili domestici, lampade di ispezione portatili).

Use in domestic premises, kitchens and offices, for ordinary duty applications and supplying appliances where cables are subject to low mechanical stresses (e.g. vacuum cleaners, cooking appliances, soldering irons, toasters, domestic portable tools, hand held inspection lamps).

Norme | Standards



EN 50525-2-21

Confezionamento | Packaging



Codice colori | Colours code



CEI UNEL 00722/ HD 308

Approvazioni | Approvals

<HAR>

Caratteristiche | Characteristics

Temperatura di esercizio
Operating temperature

-25°C ÷ +60°C sul conduttore
-25°C ÷ +60°C on the conductor

Tensione nominale
Rated voltage

300/500 V

Temp. max di cortocircuito
Max temp. of short circuit

200°C sul conduttore (durata max. 5 secondi)
200°C on the conductor (max duration 5 seconds)

Raggio di curvatura min.
Min. bending radius

Posa mobile: 4 x diametro esterno
Mobile installation: 4 x outer diameter
Posa fissa: 3 x diametro esterno
Fixed installation: 3 x outer diameter

Configurazioni | Configurations

Sezione nominale Nominal size mm ²	Diametro max fili Max diameter of wires mm	Diametro esterno Outer diameter mm	Peso cavo Cable weight kg/km
2x0,75	0,21	6,1	53
2x1,00	0,21	6,6	64
3G0,75	0,21	6,6	65
3G1,00	0,21	7	77
4G0,75	0,21	7,2	80
4G1,00	0,21	7,6	95

