


Flexible heat-resistant cable, silicone rubber insulated, polychloroprene sheathed.

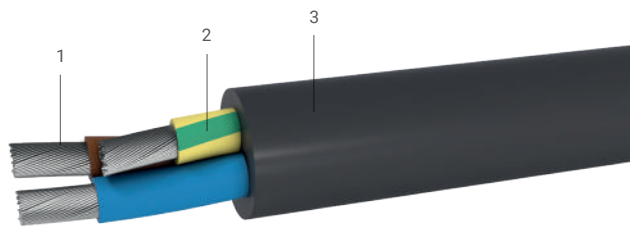

1.Rame flessibile Classe 5 CEI EN 60228 | Flexible copper Class 5 CEI EN 60228
2.Gomma siliconica | Silicone rubber • 3.PCP | PCP

Suitable for installation in industrial application, instrumentations, sensors and equipment.

Confezionamento | Packaging



IEC 60228
EN 50363



-50°C ÷ +90°C sul conduttore
-50°C ÷ +90°C on the conductor

300/500 V

Posa fissa: 3 x diametro esterno
Fixed installation: 3 x outer diameter
Posa mobile: 4 x diametro esterno
Mobile installation: 4 x outer diameter

Su richiesta
Upon request

